

# ROUGH COUNTRY

## SUSPENSION SYSTEMS®

### 2003-2013 2500/3500 CONTROL ARM DROP BRACKETS

Rough Country recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating safety of the vehicle. Average professional install time for this kit is 2-4 hours.

Please read all the instructions before beginning the installation. Check the kit hardware against the kit contents list on the last page. Be sure you have all the needed parts and understand where they go.

**⚠ WARNING** Product Use Information As a general rule, the taller a vehicle is the easier it will roll. We strongly recommend, because of roll-over possibility, that the vehicle be equipped with a functional roll-bar and cage system. Seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur.

Also check the steering stabilizer. It is a good idea when adding larger than stock tires to go with a larger bore steering stabilizer or a dual unit for tires 35+ and above. Inspect the stabilizer and replace as necessary.

Braking performance and capability are decreased when significantly large/heavier tires and wheels are used. Take this into consideration while driving.

Do not add, alter, or fabricate any factory or after-market parts which increase vehicle height over the intended height of the Rough Country product purchased. Mixing component brands, lifts, and/or combining body lift with suspension lifts voids all warranties. Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered.

The relocation brackets are used to flatten out the angle of the control arms to maintain your factory handling characteristics of the vehicle. These brackets are designed to use with Rough Country 5+ Dodge 2500/3500 kit using factory control arms or adjustable arms at factory lengths.

#### **⚠ NOTICE** Notice to Dealer and Vehicle Owner

Any vehicle equipped with any Rough Country product must have the Warning to Driver decal installed on the sun visor or dash. The decal is to act as a constant reminder for whoever is operating the vehicle of its unique handling characteristics. By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable Federal, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyer's responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

**INSTALLING DEALER—It is your responsibility to install the warning decal and to forward these installation instructions to the vehicle owner for review and to be kept in the vehicle for its service life.**

#### Tools Needed

13mm	5/8+
14mm	11/16+
15mm	1 1/16+
18mm	7/16 Drill bit
19mm	
21mm	
22mm	
24mm	
Jack stands	
Floor jack	



1. When raising vehicle using a jack or lift do not place lift arms or jack stands on frame between lower control arm and transmission cross-member. This is done so new parts can be installed. **See Photo 1**
2. Remove the track bar bolt on frame side using a 21mm socket. Then raise vehicle and remove tires and wheels using 22mm socket
3. Remove the four bolts from the sway-bar mounts on frame using 15mm socket. **See Photo 2** Using a 13mm socket remove brake line bracket from axle on driver and passenger side. Disconnect drag link from pitman arm using a 21mm wrench and a hammer to strike the end of the pitman arm breaking loose the taper.



Photo 1



Photo 2

4. Support front axle with a jack or jack stands. Using a 18mm wrench remove upper shock nut. Then using a 15mm wrench remove upper shock mount. Use a 21mm socket for lower shock bolts. Remove shocks.
5. Raise vehicle up and remove coil springs
6. On passenger side remove upper control arm bolt on axle side using a 21mm socket and wrench. Remove bolt from lower control arm on frame side using a 21m wrench and a 1 1/16 socket. Placing a jack under passenger side on axle slowly move axle forward until upper control arm can be move above axle **See Photo 3**
7. Install the supplied sleeve then install upper control arm bracket using the supplied 9/16 x 5+long bolts, washers, and nuts. Make sure new bracket and old upper control arm mount are straight with one another then tighten bolt using a 21mm and a 22mm wrench. **See Photo 4, 5, 6.** On some models grinding is required on the factory upper control bracket edge. **See Photo 5**



Photo 3



Photo 4

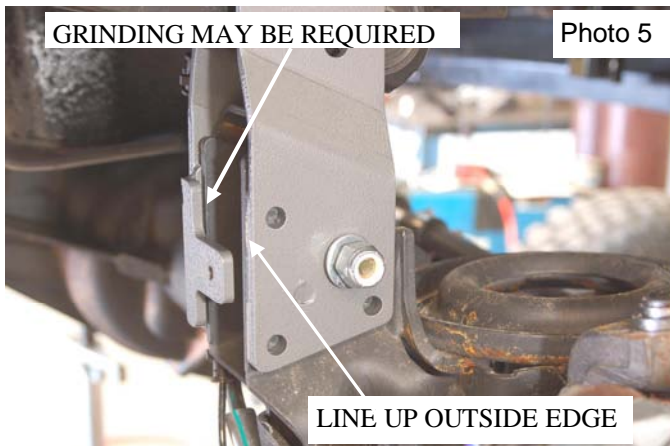


Photo 5



Photo 6



- Using a 24mm socket remove brake caliper bolts and hang caliper out of the way. **See Photo 7** Using control arm drop bracket as a guide drill all six holes using a 7/16 drill bit. Install the 7/16 x 1.5+long bolts, washers, and nuts into drilled holes. Tighten bolts using 5/8 and a 11/16 wrench. **See Photo 8**



- Reinstall brake caliper with stock hardware using a 24mm socket to tighten.
- Install the supplied flag nut into slotted hole behind body mount. **See Photo 9** Install lower control arm drop bracket using supplied 5/8 x 4.5+long bolt, nut, and washer. Use the 1/2 x 1.5+bolt, washer, and nut for rear of drop mount. **See Photo 10** Install lower and upper control arms into pockets using stock hardware. Tighten 1/2 bolt using a 19mm socket and wrench, and tighten the 5/8 bolt using 24mm wrench and socket. Do not tighten lower and upper control arm pivot bolts at this time.



- Install coil spring and shock at this time using stock hardware for lower. Use a 14mm wrench for upper shock nut and a 21 mm socket for lower shock bolt.
- Repeat steps 4-11 on the driver side
- Reinstall brake line brackets on the driver and passenger side lower control arm drop brackets using stock hardware and a 13mm socket to tighten.
- Connect the draglink back to the pitman arm and tighten using a 21mm wrench and also connect the sway-bar to the frame using factory hardware and a 15mm socket.
- Install tires and wheels and tighten with a 22 mm socket and lower truck to the ground.
- Reinstall the track bar to the frame with the factory bolt, tighten with a 21mm socket. If the track bar sleeve and frame bracket hole do not line up, start the truck and by turning the steering wheel this will move the frame to align the bolt holes.
- Tighten the upper control arm bolts using a 21mm socket and wrench, and tighten the lower control arm bolts using a 21m wrench and a 1 1/16 socket.

### Post Installation

- Check all fasteners for proper torque. Check to ensure there is proper clearance between all rotating, mobile, fixed, and heated parts.
- Perform steering sweep to check the distance between tires, break hoses, steering components, and sway-bar.
- Check the torque of all fasteners after the first 500 miles after install.

## Kit Picture



## Kit Contents

- 1- Lower driver side control arm bracket
- 1- Lower passenger side control arm bracket
- 2- Upper control arm brackets
- 1- Driver side flag nut
- 1- Passenger side flag nut

### 1342Bag1

- 2- Sleeves 14mm x .875 x 2.35
- 2- 9/16 x 5+bolts
- 4- 9/16 nylocks
- 2- 9/16 washers
- 12- 7/16 x 1.5+bolts
- 12- 7/16 nylocks
- 24- 7/16 washers

### 1342Bag2

- 2- 5/8 x 4.5+bolts
- 2- 5/8 nylocks
- 4- 5/8 washers
- 2- 1/2 x 1.5+bolts
- 2- 1/2 washers

Thank you for choosing Rough Country Suspension for your Off Road needs.

